

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB2008/001883

International filing date: 03 June 2008 (03.06.2008)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0710663.6
Filing date: 04 June 2007 (04.06.2007)

Date of receipt at the International Bureau: 26 June 2008 (26.06.2008)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with patent application GB0710663.6 filed on 4 June 2007.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

William Morell


Dated 20 June 2008

**Intellectual
Property
Office** □□□□

For Creativity and Innovation

Patents Form 1/77

Patents Act 1977
(Rule 16)

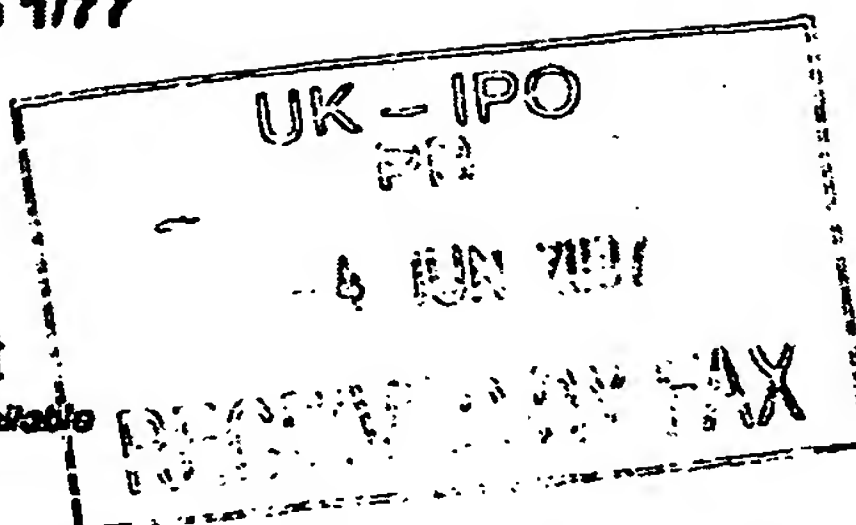**Request for grant of a patent**

(An explanatory leaflet on how to fill in this form is available from the office)

Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

Application number GB

1. Your reference: **P101318.GB.01/NHE**
(optional)

0710663.6

2. Full name, address and postcode of the applicant
or of each applicant (underline all surnames):

Pursuit Dynamics plc
Shackleton House
Kingfisher Way
Hinchingsbrooke Business Park
Huntingdon
Cambridgeshire PE29 6HB

Patents ADP number (if you know it):

J292951/ 001 D02884 P01/77NOFEE....
05JUN07 0.00 ACCOUNT 0710663.6

If the applicant is a corporate body, give the
country/state of its incorporation:

United Kingdom

8333072003

3. Title of the invention: **An Improved Mist Generating Apparatus and Method**

4. Name of your agent (if you have one):

Murgitroyd & Company

"Address for service" to which all correspondence
should be sent. This may be in the European
Economic area for most applications, but must
be in the United Kingdom for any application
covered by the warning note below
(including the postcode)

Scotland House
165-169 Scotland Street
Glasgow, G5 8PL
United Kingdom

Patents ADP number (if you know it):

1198015

5. Priority declaration: Are you claiming
priority from one or more earlier-filed
patent applications? If so, please give
details of the application(s):

Country

Application number
(if you know it)

Date of filing
(day / month / year)

6. Divisionals etc: Is this application a divisional
application, or being made following resolution
of an entitlement dispute about an earlier
application? If so, please give the application
number and filing date of the earlier application:

Number of earlier UK application

Date of filing
(day / month / year)

7. Inventorship: (Inventors must be individuals not companies)

(Please tick the appropriate boxes)

Are all the applicants named above also inventors?

YES ☐

NO ☒

If yes, are there any other inventors?

YES ☐

NO ☐

8. Are you paying the application fee with this form?

YES ☐

NO ☒

(REV APR06)

UK Intellectual Property Office is an operating name of the Patent Office

Patents Form 1/77

TransactionId -> 2 20070604161716 10598

72

Patents Form 1/77

9. Accompanying documents: not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form:

Description: 13 /

Claim(s):

Abstract: 8

Drawing(s): 3 /

If you are not filing a description, please give details of the previous application you are going to rely upon:

Country

Application number

Date of filing
(day / month / year)

10. If you are also filing any of the following, state how many against each item.

Priority documents:

Statement of inventorship and right to grant of a patent (Patents Form 7/77):

Request for search (Patents Form 9A/77):

Request for substantive examination (Patents Form 10/77):

Any other documents:
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s):

Date:

04/06/2007

Murgitroyd & Co
(MURGITROYD & CO.)

12. Name, e-mail address, telephone, fax and/or mobile number, if any, of a contact point for the applicant:

Niall Hendry
0141 307 8400
niall.hendry@murgitroyd.co.uk

Warning

After an application for a patent has been filed, the Comptroller of the office will consider whether publication or communication of the invention should be prohibited or restricted under section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you are resident in the United Kingdom and your application contains information which relates to military technology, or would be prejudicial to national security or the safety of the public, section 23 of the Patents Act 1977 prohibits you from applying for a patent abroad without first getting written permission from the office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked. Until such time or until the revocation of any direction, for any such application the address for service referred to at part 4 above must be in the United Kingdom.

Notes

A leaflet on how to fill in this form is available from the office. If you would like a copy of the leaflet it is available on our website at <http://www.ipa.gov.uk/patent/info/fact05.pdf> or alternatively you could telephone 08459 500505 or send an email to enquiries@ipo.gov.uk to request a copy.

(REV APR06)

Patents Form 1/77

TransactionId -> 2 20070604161716 10598

An Improved Mist Generating Apparatus and Method

The present invention relates to the field of mist generating apparatus. More specifically, the invention is directed to an improved apparatus and method for generating liquid droplet mists.

5.

Mist generating apparatus are known and are used in a number of fields. For example, such apparatus are used in both fire suppression and cooling applications, where the liquid droplet mists generated are more effective than a conventional fluid stream. Examples of such mist generating apparatus can be found in WO2005/082545 and
10 WO2005/082546 to the same applicant.

15

Whilst such apparatus are easily capable of generating liquid droplet mists, they are limited in that they can only project the mists over short distances and have a low efficiency.

It is an aim of the present invention to obviate or mitigate one or more of the aforementioned disadvantages.

20

According to a first aspect of the present invention there is provided an apparatus for generating a mist comprising:

a first transport fluid passage having a first transport fluid inlet and a first transport fluid outlet, and having convergent-divergent internal geometry;

25

at least one working fluid chamber located radially outwardly of the first transport fluid passage and having a working fluid inlet and a working fluid outlet;

at least one second transport fluid passage having a second transport fluid inlet and a second transport fluid outlet in fluid communication with the working fluid chamber; and

5 an outlet nozzle in fluid communication with the first transport fluid and working fluid outlets;

wherein the second transport fluid passage has an outlet located in the working fluid chamber upstream of the working fluid outlet.

10 Preferably, the second transport fluid inlet is in fluid communication with the first transport passage such that the second transport fluid passage receives transport fluid from the first transport fluid passage.

15 Preferably, the first fluid transport inlet receives transport fluid from a first source.

Alternatively, the first fluid transport passage receives transport fluid from a first source and the second transport fluid passage receives transport fluid from a second separate transport fluid source.

20 Preferably, the working fluid outlet is located radially outwardly from the first transport fluid outlet.

25 Preferably, a portion of the working fluid chamber adjacent the working fluid outlet is inclined relative to the longitudinal axis of the first transport fluid passage.

30 Alternatively, a portion of the working fluid chamber adjacent the working fluid outlet is substantially parallel to the longitudinal axis of the first transport fluid passage.

Alternatively, the working fluid outlet is located adjacent a throat portion of the convergent-divergent internal geometry of the first transport fluid passage.

- 5 Preferably, the working fluid outlet adjacent the throat portion of the convergent-divergent internal geometry is inclined relative to the longitudinal axis of the first transport fluid passage.

- 10 Alternatively, a portion of the working fluid passage adjacent the working fluid outlet is substantially perpendicular to the longitudinal axis of the first transport fluid passage.

- 15 Preferably, the second transport fluid passage has an inlet located in the first transport fluid passage upstream of the convergent-divergent portion of the first transport fluid passage.

Preferably, the first transport fluid passage is generally cylindrical in shape.

- 20 Preferably, the working fluid chamber is generally annular in shape.

Preferably, the working fluid chamber circumscribes the first transport fluid passage.

- 25 Preferably, the working fluid chamber includes a plurality of working fluid inlets.

Preferably, the second transport fluid passage and a portion of the working fluid chamber adjacent the working fluid outlet are arranged such that

there is a substantially straight-through passageway between the inlet to the second transport fluid passage and the working fluid outlet.

5 Preferably, the divergent portion of the convergent-divergent geometry of the first transport fluid passage includes a portion where the increasing diameter of the divergent passage is suddenly decreased.

10 Preferably, the apparatus comprises a plurality of second transport fluid passages.

Preferably, the plurality of second transport fluid passages are arranged circumferentially around the first transport fluid passage.

15 According to a second aspect of the invention, there is provided a method of generating a mist, the method comprising the steps of:

supplying a first portion of a transport fluid to a first transport fluid passage having a first transport fluid inlet, a first transport fluid outlet and convergent-divergent internal geometry;

20 supplying a working fluid to at least one working fluid chamber located radially outwardly of the first transport fluid passage and having a working fluid inlet and a working fluid outlet;

25 supplying a second portion of transport fluid through at least one second transport fluid passage into the working fluid chamber, wherein the second transport fluid passage has an outlet upstream of the working fluid outlet;

imparting a shear force on the working fluid by way of the second portion of the transport fluid exiting the second transport fluid passage outlet, thereby partially atomising the working fluid as it passes through the working fluid chamber; and

directing the partially atomised working fluid and the first portion of transport fluid to an outlet nozzle in fluid communication with the respective first transport fluid and working fluid outlets, wherein the respective outlets are arranged such that the first portion of transport fluid flow imparts a further shear force on the partially atomised working fluid to atomise the working fluid still further.

Preferably, the second portion of the transport fluid is directed to the second transport fluid passage from the first transport fluid passage.

10

Preferably, the supply of the first portion of transport fluid to the first transport fluid passage is from a first source.

Alternatively, the supply of the first portion of transport fluid to the first transport fluid passage is from a first source and the supply of the second portion of transport fluid to the second transport fluid passage is from a second separate transport fluid source.

15

Preferably, the step of supplying the second portion of the transport fluid through the at least one second transport fluid passage includes directing transport fluid in the first transport passage to an inlet of the second transport fluid passage located upstream of the convergent-divergent portion of the first transport fluid passage.

20

Preferably, the second portion of the transport fluid is directed through a plurality of second transport fluid passages which connect the first transport fluid passage and working fluid chamber.

25

Preferably, the method comprises the further step of passing the atomised working fluid through a stationary aerodynamic shockwave to atomise the working fluid further still.

- 5 Preferably, the step of passing the atomised working fluid through a stationary aerodynamic shockwave includes providing a portion in the divergent portion of the convergent-divergent geometry where the increasing diameter of the divergent passage is suddenly decreased.
- 10 Preferred embodiments of the present invention will be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a cross sectional side view of part of a mist generating apparatus according to a first embodiment of the present invention;

- 15 Figure 2 is a cross sectional side view of part of a mist generating apparatus according to a second embodiment of the present invention; and

Figure 3 is a cross section side view of part of a mist generating apparatus according to a third aspect of the present invention.

20

Figure 1 shows a first embodiment of a mist generating apparatus 10 according to the present invention. The apparatus 10 comprises a first transport fluid passage 12, a working fluid chamber 14 and an outlet nozzle 16.

25

The first transport fluid passage 12 is generally cylindrical in shape and has a first transport fluid inlet 12a and a first transport fluid outlet 12b. The first transport fluid passage 12 also has convergent-divergent internal geometry. The convergent-divergent geometry comprises a converging

portion 18, a diverging portion 20 and a throat portion 22 located between the converging and diverging portions 18, 20.

5 The working fluid chamber 14 is located radially outwardly of the first transport fluid passage 12. In this arrangement, the working fluid chamber 14 partially circumscribes the first transport fluid passage 12. The working fluid chamber 14 has a working fluid inlet 14a and a working fluid outlet 14b. A portion 14e of the working fluid chamber 14 adjacent the working fluid inlet 14a is substantially perpendicular to the longitudinal axis 26 of
10 the first transport fluid passage 12. The working fluid chamber 14 also has a converging portion 14c between the inlet 14a and the outlet 14b. A portion 14d of the working fluid chamber adjacent the working fluid outlet 14b is inclined relative to the longitudinal axis 26 of the first transport fluid passage 12.

15

The outlet nozzle 16 is in fluid communication with the first transport fluid outlet 12a and the working fluid outlet 14a.

20 The apparatus 10 also comprises a second transport fluid passage 24 which allows fluid communication between the first transport fluid passage 12 and the working fluid chamber 14. The second transport fluid passage 24 has a second fluid inlet 24a located in the first transport fluid passage 12 upstream of the convergent-divergent portion 18, 20. The second transport fluid passage 24 also has a second fluid outlet 24b located in the
25 working fluid chamber 14 upstream of the working fluid outlet 14b.

In the embodiment of figure 1, the working fluid outlet 14b is located radially outwardly from first transport fluid outlet 12b. In this arrangement a portion 14d of the working fluid chamber 14 adjacent to the working fluid
30 outlet 14b is inclined relative to the longitudinal axis 26 of the first transport

fluid passage 12. Also, the second transport fluid passage 24 and the portion 14d of the working fluid chamber 14 adjacent the working fluid outlet 14b are arranged such that there is a substantially straight-through passageway between the second inlet 24a of the second transport fluid passage 24 and the working fluid outlet 14b.

The operation of the first embodiment will now be described. A working fluid, such as water for example, is introduced to the working fluid chamber 14. The working fluid flows along the chamber 14 and exits the working fluid outlet 14b at the outlet nozzle 16. A transport fluid (an example of a first portion of a transport fluid), such as steam for example, is introduced to the first transport fluid passage 12. Due to the convergent-divergent geometry of the first transport fluid passage 12, the passage 12 acts as a venturi section, accelerating the transport fluid as it passes therethrough. The accelerated transport fluid exits the first transport fluid outlet 12b at the outlet nozzle 16. This acceleration of the transport fluid ensures that the transport fluid exits the outlet nozzle 16 at a very high velocity.

Upstream of the convergent-divergent section a portion of the transport fluid (an example of a second portion of transport fluid) also flows through the second transport fluid passage 24 towards the working fluid chamber 14. The transport fluid enters at the second fluid inlet 24a and exits at the second fluid outlet 24b. The transport fluid enters the working fluid chamber 14 upstream of the working fluid outlet 14b. As the transport fluid enters the working fluid chamber 14 it imparts a shear force on the working fluid thereby partially atomising the working fluid as it passes through the working fluid chamber 14.

With the first portion of the transport fluid flowing at such high velocity and the partially atomised working fluid exiting the working fluid chamber 14 at the working fluid outlet 14b, the partially atomised working fluid is subjected to further shear forces by the transport fluid. The result of this is that the partially atomised working fluid is atomised further by the transport fluid and a dispersed droplet flow regime is produced having extremely small water droplets. Furthermore, the turbulence created by the transport fluid also aids in the atomisation of the working fluid. Also, the expansion of the working fluid exiting the outlet nozzle 16 causes further atomisation of the working fluid.

The apparatus 10 therefore creates a flow of substantially uniform sized droplets from the working fluid. Due to the fact that the transport fluid is transported centrally along the first transport fluid passage 12, the apparatus is capable of projecting the droplets a great distance.

Figure 2 shows a second embodiment of the mist generating apparatus 100. In figure 2 the working fluid outlet 114b is located adjacent the throat portion 122 of the convergent-divergent portion 118, 120. In this arrangement a portion 114d of the working fluid chamber 114 adjacent the working fluid outlet 114b is inclined relative to the longitudinal axis 126 of the first transport fluid passage 112.

The operation of the second embodiment is similar to that of the first embodiment, the major difference being that the working fluid exits the working fluid chamber 114 adjacent the throat portion 122 of the convergent-divergent portion 118, 120. In the second embodiment the working fluid is again partially atomised by the transport fluid exiting the second transport fluid passage 124 upstream of the working fluid outlet 114b. The partially atomised working fluid entering the first transport fluid

passage 112 at the throat portion 122 is subjected to the same shearing by the accelerated transport fluid as in the first embodiment. In this arrangement, the partially atomised working fluid enters the first transport fluid passage 112 against the flow of the transport fluid. This aids the shearing effect of the accelerated transport fluid, thus increasing the atomisation of the working fluid. Furthermore, working fluid located on the walls of the divergent portion 120 is stripped therefrom by the transport fluid and the expansion of the working fluid exiting at the nozzle outlet 116 causes further atomisation of the working fluid.

10

Figure 3 shows a third embodiment of the mist generating apparatus 200. In figure 3 the divergent portion 220 of the convergent-divergent geometry 218, 220 includes a portion 228 where the increasing diameter of the divergent portion 220 is suddenly decreased. This produces a stepped portion which includes a ring-shaped surface 222a, which lies in a plane which is substantially perpendicular to the longitudinal axis 226.

15

The purpose of the portion 228 is to create a stationary aerodynamic shockwave in the apparatus 200.

20

The operation of the third embodiment is similar to that of the first and second embodiments, the only difference being that the dispersed droplet flow regime exiting the outlet nozzle 216 passes through the stationary aerodynamic shockwave. This shockwave creates further atomisation of the dispersed droplet flow regime.

25

The mist generating apparatus 10 therefore obviates or mitigates the disadvantages of previous proposals by pre-atomising the working fluid upstream of the working fluid outlet 14b and providing centralised transportation of the transport fluid. Pre-atomising the working fluid

30

upstream of the working fluid outlet 14b results in less transport fluid being required to produce the dispersed droplet flow regime. This increases the efficiency of the apparatus 10. Also, providing centralised transportation of the transport fluid allows the dispersed droplet flow regime to be projected further than conventional methods.

Modifications and improvements may be made to the above without departing from the scope of the present invention. For example, although the portion 14e of the working fluid chamber 14 adjacent the working fluid inlet 14a has been illustrated and described above as being substantially perpendicular to the longitudinal axis 26 of the first transport fluid passage 12, it should be appreciated that the portion 14e of the working fluid chamber 14 adjacent the working fluid inlet 14a may be substantially parallel to the longitudinal axis 26 of the first transport fluid passage 12. In this case the working fluid chamber 14 is generally annular in shape and circumscribes the first transport fluid passage 12.

Also, although the working fluid chamber 14 has been described above as having one working fluid inlet 14e, it should be appreciated that working fluid chamber 14 may have a plurality of working fluid inlets 14e.

Also, although the portion 14d of the working fluid chamber 14 adjacent the working fluid outlet 14b has been described and illustrated above as being inclined relative to the longitudinal axis 26 of the first transport fluid passage 12, it should be appreciated that the portion 14d of the working fluid chamber 14 adjacent the working fluid outlet 14b may be substantially parallel to the longitudinal axis 26 of the first transport fluid passage 12.

Furthermore, although the portion 114d of the working fluid chamber 114 adjacent the working fluid outlet 114b has been described and illustrated

above as being inclined relative to the longitudinal axis 126 of first transport fluid passage 112, it should be appreciated that the portion 114d of the working fluid chamber 114 adjacent the working fluid outlet 114b may be substantially perpendicular to the longitudinal axis 126 of first transport fluid passage 112.

It should also be appreciated that the angle of inclination between the portion 14d, 114d of the working fluid chamber 14 adjacent the working fluid outlet 14b, 114b and the longitudinal axis 26, 126 of the first transport fluid passage 12, 112 may be any angle between 0 and 90 degrees.

Also, although the apparatus 10 has been illustrated and described above as having a single second transport fluid passage 24, it should be appreciated that the apparatus 10 may comprise a plurality of second transport fluid passages. In this case the second transport fluid passages are arranged circumferentially around the first transport fluid passage 12.

Furthermore, although the portion 228 has been illustrated and described above as creating a stationary aerodynamic shockwave in the apparatus 10, it should be appreciated that a stationary aerodynamic shockwave may be created in the apparatus 10 by selecting a suitable geometry of the apparatus 10.

Also, although the second transport fluid passage 24 has been illustrated and described above as receiving transport fluid from the first transport fluid passage 12 by directing a portion of transport fluid from the first transport fluid passage 12 to the second transport fluid passage, it should be appreciated that the second transport fluid passage 24 could receive transport fluid from a separate source of transport fluid. For example, if the first transport passage 12 receives transport fluid from a first source,

13

the second transport fluid passage 24 could receive transport fluid from a second separate source.

1/3

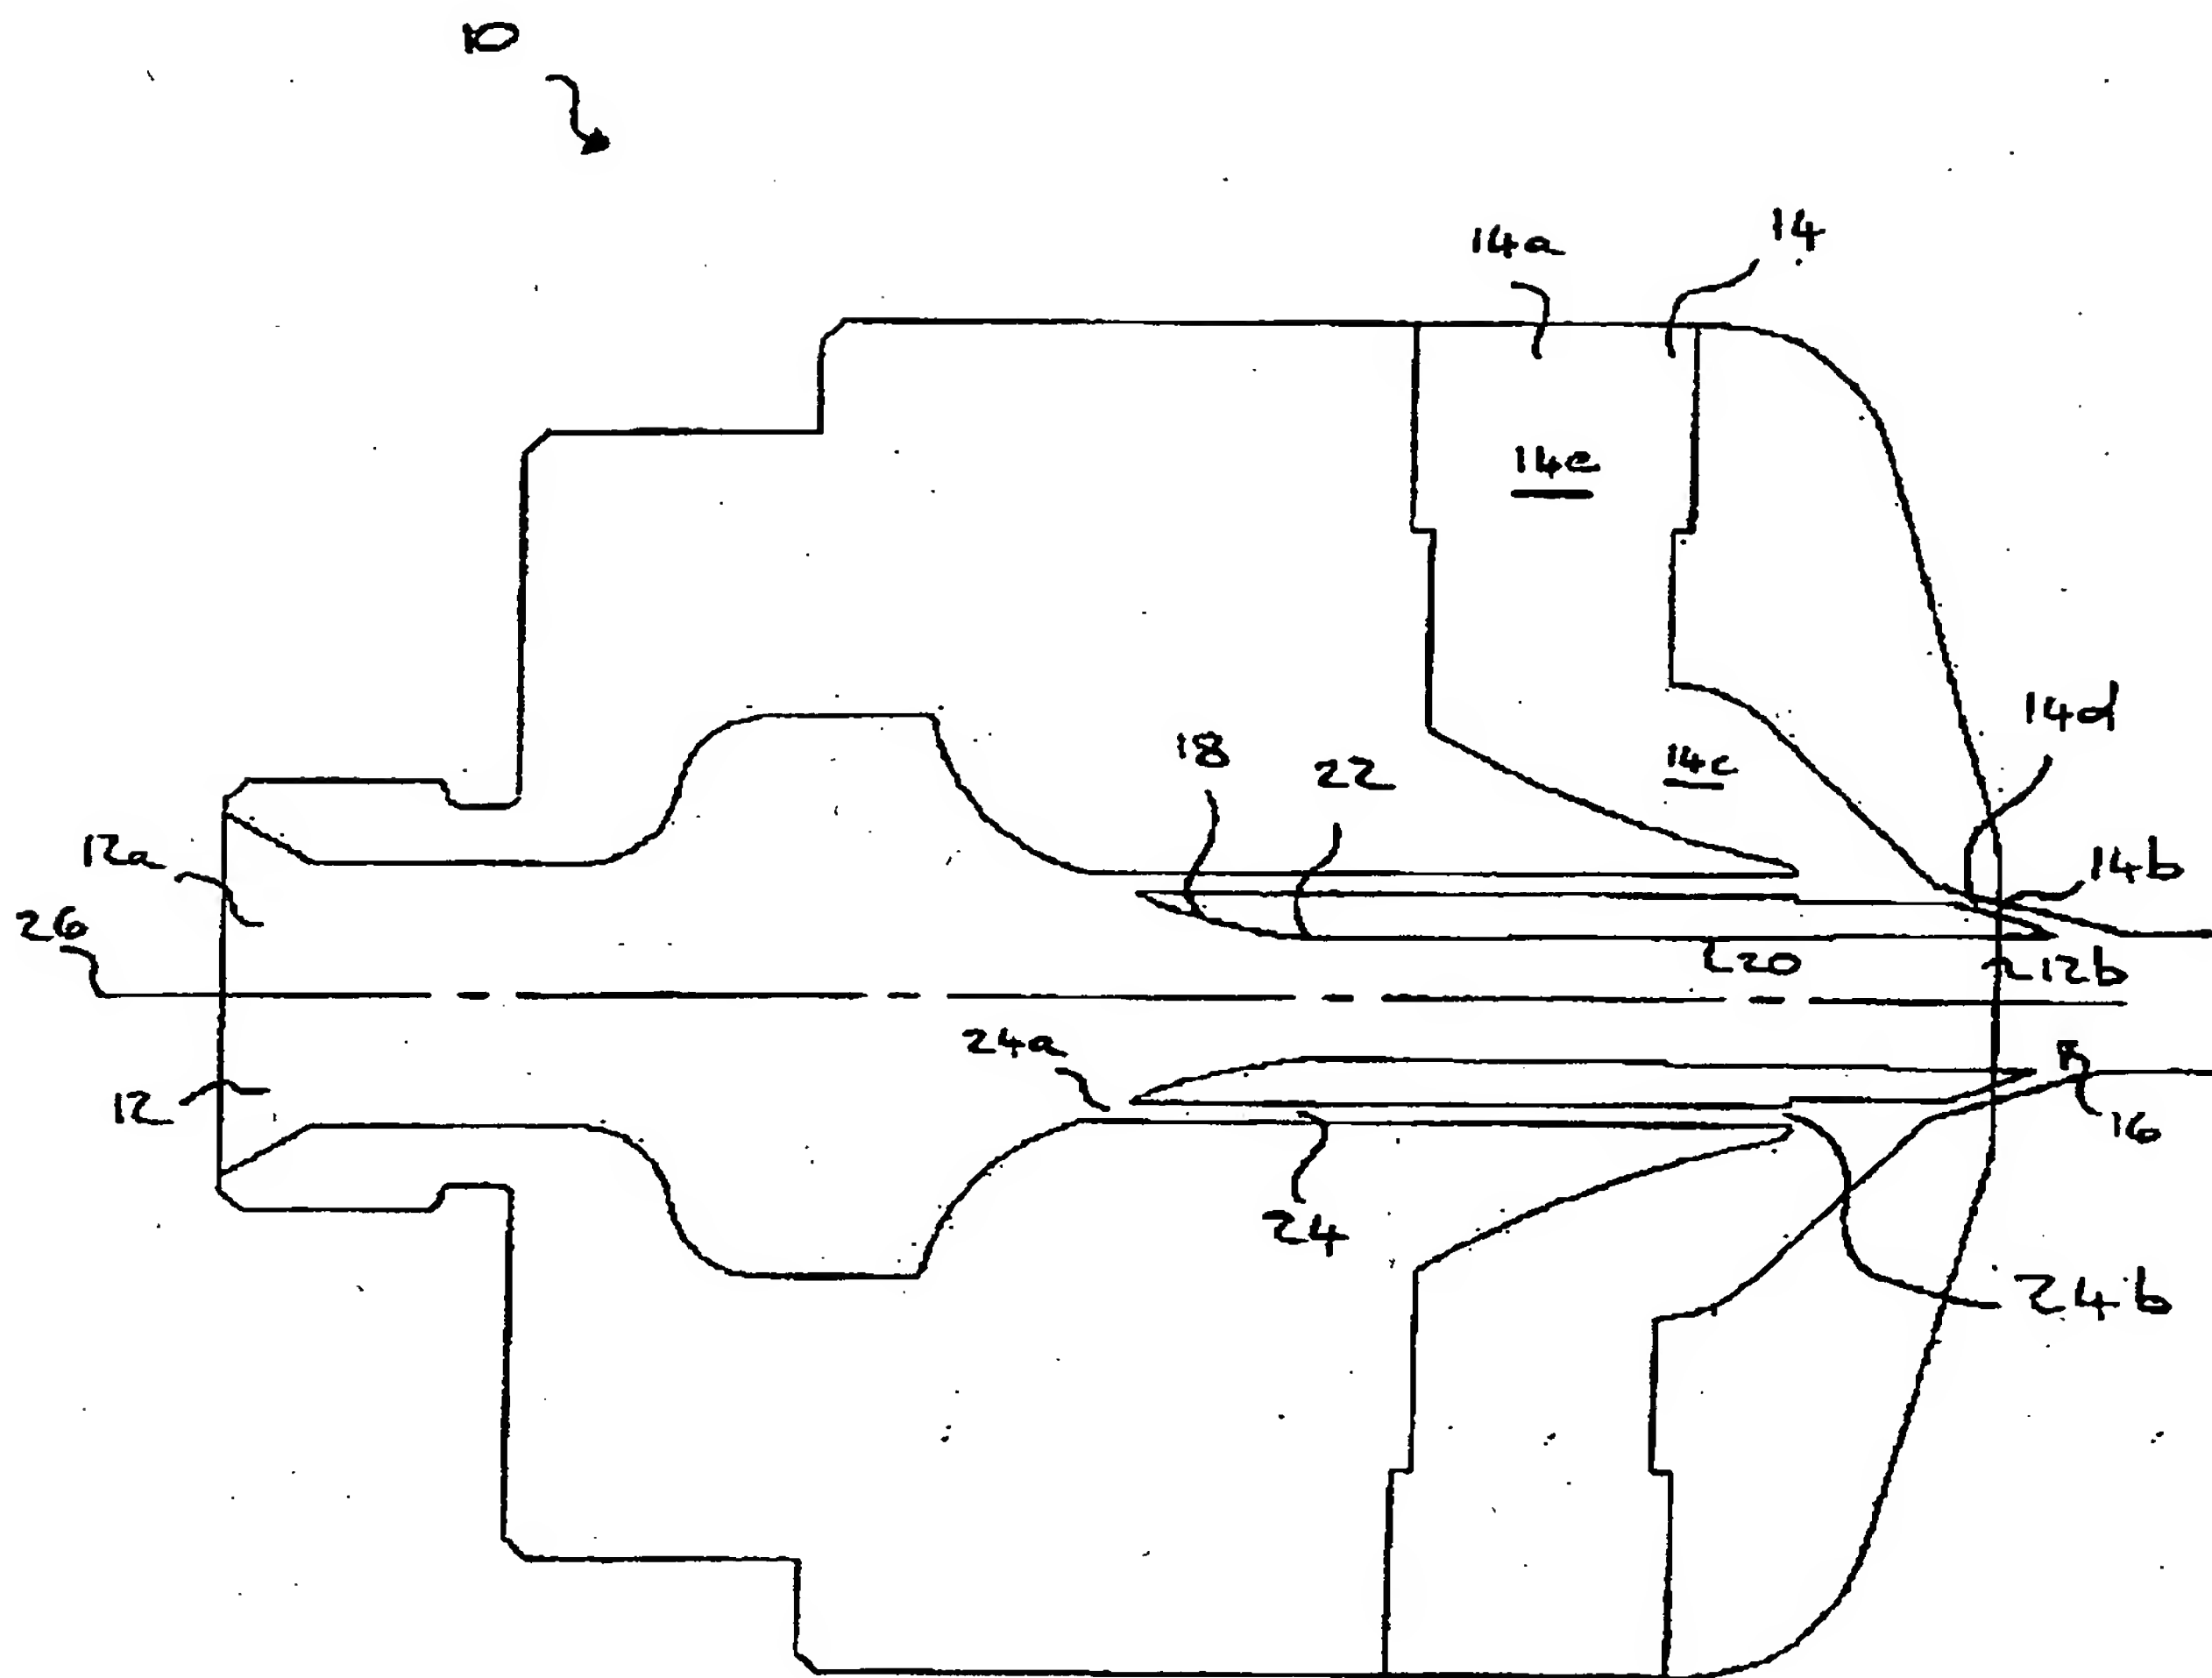


Fig. 1

3/3

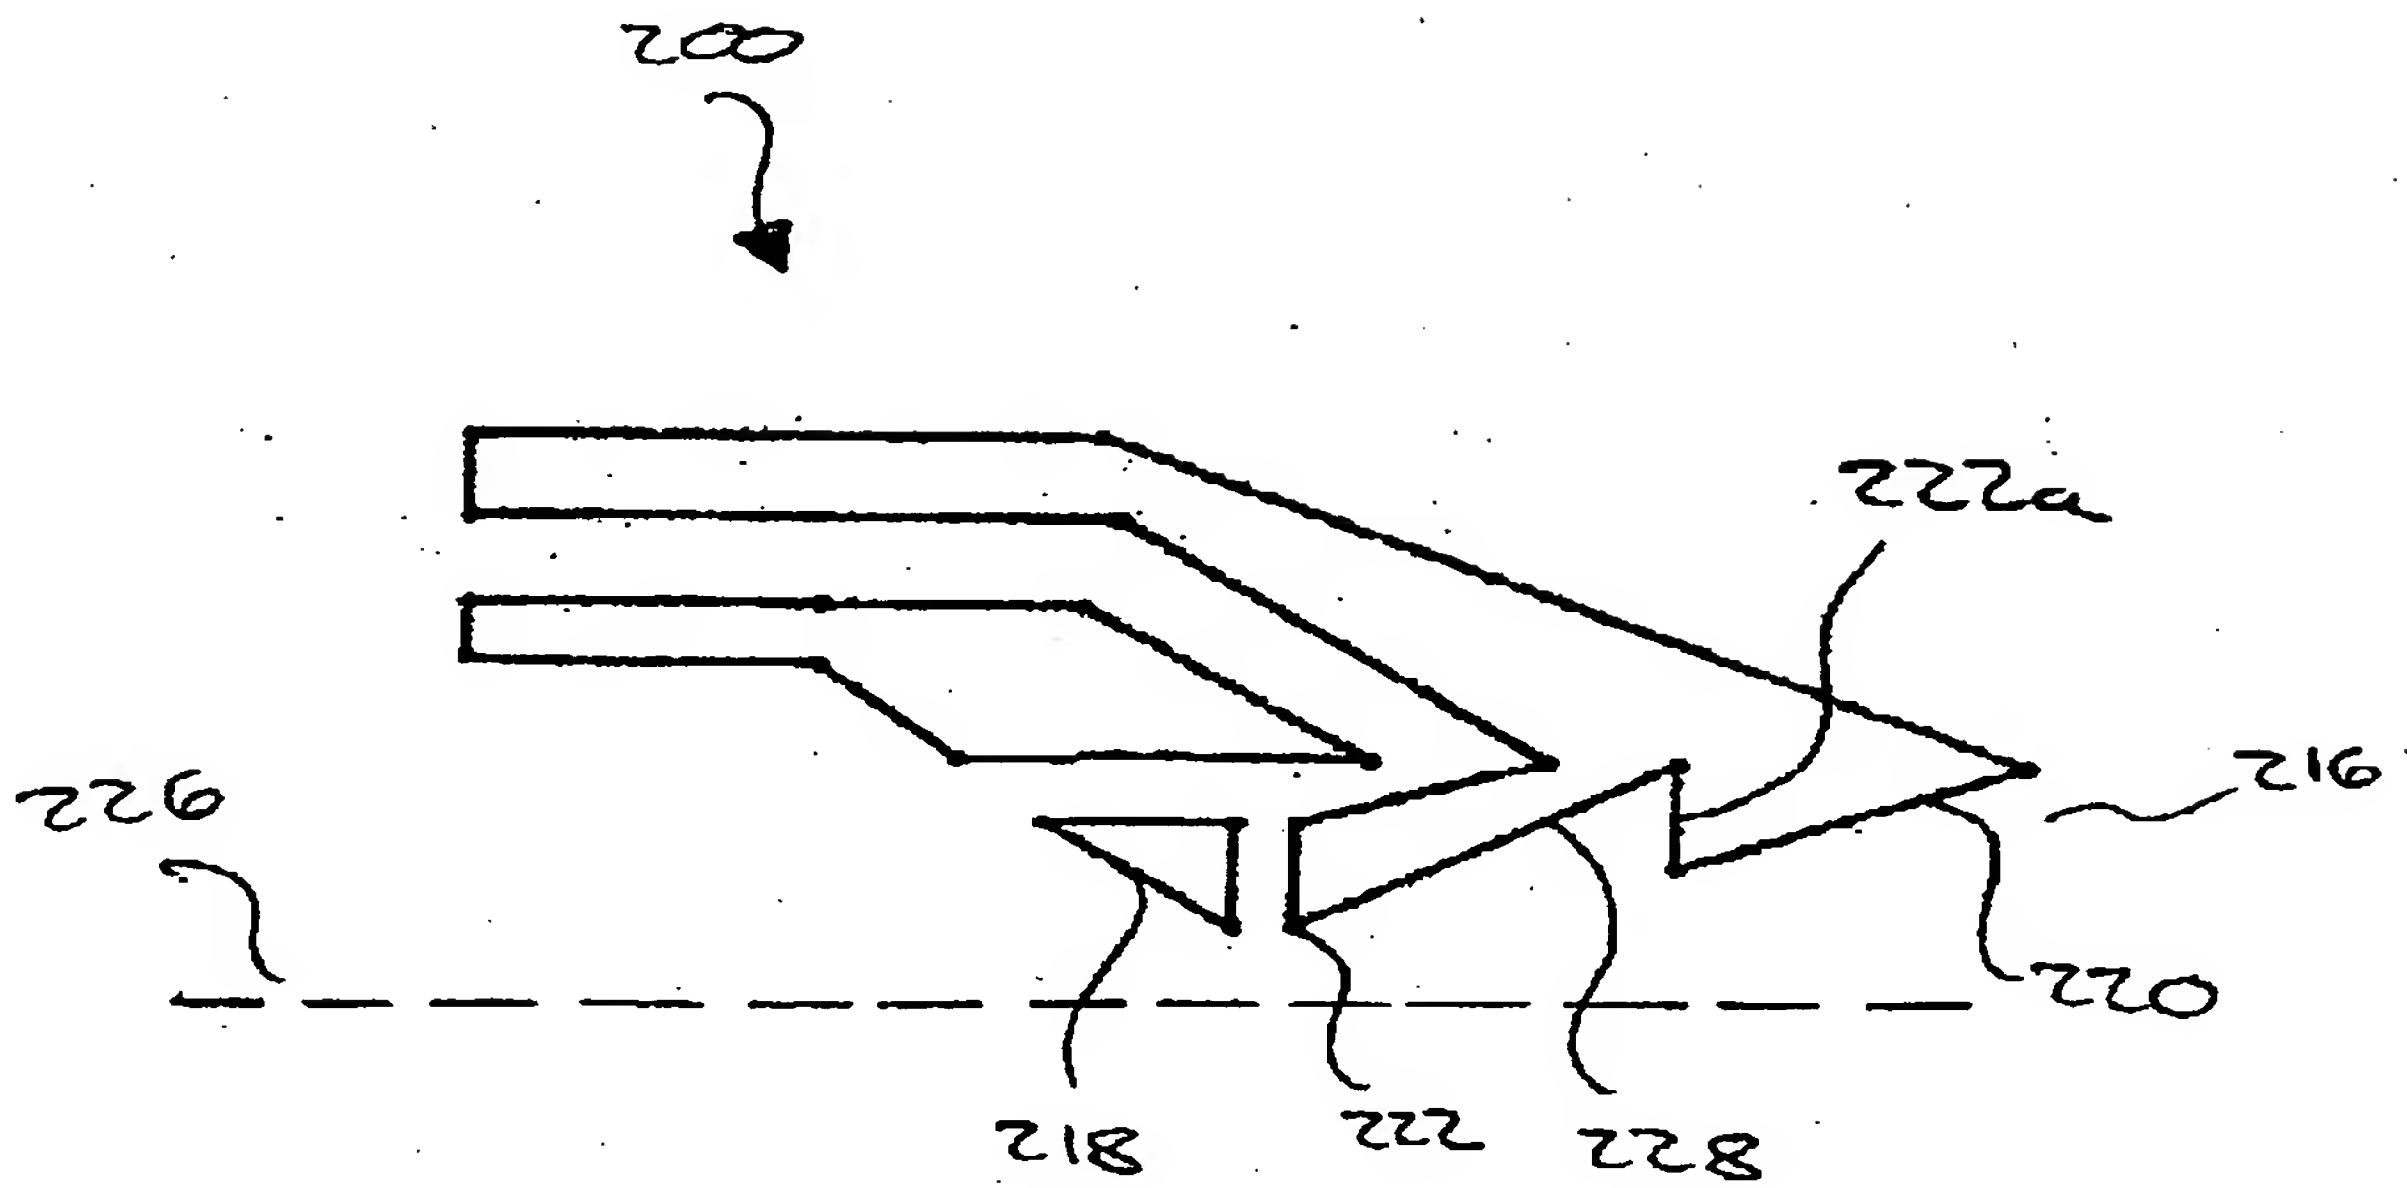


Fig. 3